


MP5 Sujeción por rótula trasera

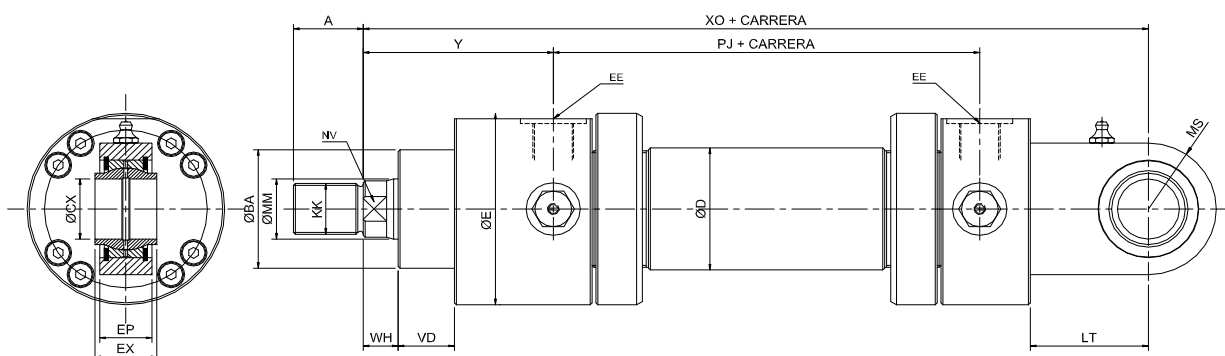

Ø	50		63		80		100		125		160		200	
MM	32	36	40	45	50	56	63	70	80	90	100	110	125	140
A	36		45		56		63		85		95		112	
BA	63		75		90		110		132		160		200	
CX	32		40		50		63		80		100		125	
D	65		78		100		120		150		190		235	
E	102		120		142		170		206		265		306	
EE	½" G		¾" G		¾" G		1" G		1" G		1" ¼ G		1" ¼ G	
EP	27		35		40		52		60		70		102	
EX	32		40		50		63		80		100		125	
KK	M 27x2		M 33x2		M 42x2		M 48x2		M 64x3		M 80x3		M 100x3	
LT	61		69		90		102		124		150		206	
MS	35		50		61.5		66		90		112		140	
NV	27	30	32	36	42	48	54	62	70	80	92	100	110	125
PJ	120		138		154		171		205		241		278	
VD	29		32		36		41		45		50		61	
WH	18		21		24		27		31		35		40	
XO	305		348		395		442		520		617		756	
Y	98		112		121		134		153		182		220	

Para cilindros con carreras superiores a 1000 mm añadir a **ZB** y **PJ** la longitud del distanciador correspondiente