


**DVS2 Doble vástago.
Sujección por patas**

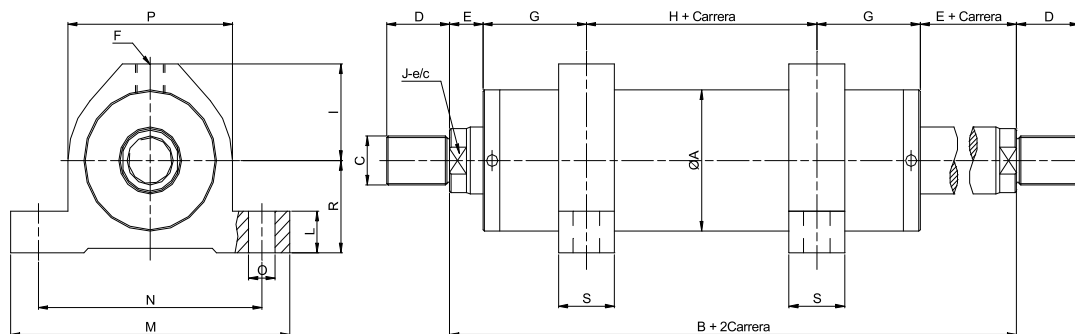

Ø Pistón	40		50		63		80		100		125		160		200	
Ø Vástago	22	28	28	36	36	45	45	56	56	70	70	90	90	110	110	140
Ø A	50		60		75		95		115		145		185		230	
B	193		214		244		272		308		352		408		471	
C	16x1.5		20x1.5		27x2		33x2		42x2		52x2		68x3		90x3	
D	22		28		36		45		56		68		86		105	
E	13		15		17		19		22		26		29		35	
F	3/8"		3/8"		1/2"		1/2"		3/4"		3/4"		1"		1"1/4	
G	50		55		64		74		83		95		113		127	
H	67		74		82		86		98		110		124		149	
I	42		46		56		68		80		100		130		155	
J	18	22	22	30	30	39	39	48	48	62	62	80	80	100	100	120
L	20		22		25		28		30		35		40		50	
M	115		135		165		200		235		280		350		425	
N	90		105		130		160		190		230		290		355	
Ø O	13		15		17		19		21		25		31		37	
P	64		74		94		118		144		180		228		282	
R	35		40		50		62		75		94		118		145	
S	25		30		35		40		45		50		60		70	

Para cilindros con carreras superiores a 1000 mm añadir a **B** la longitud del distanciador correspondiente