
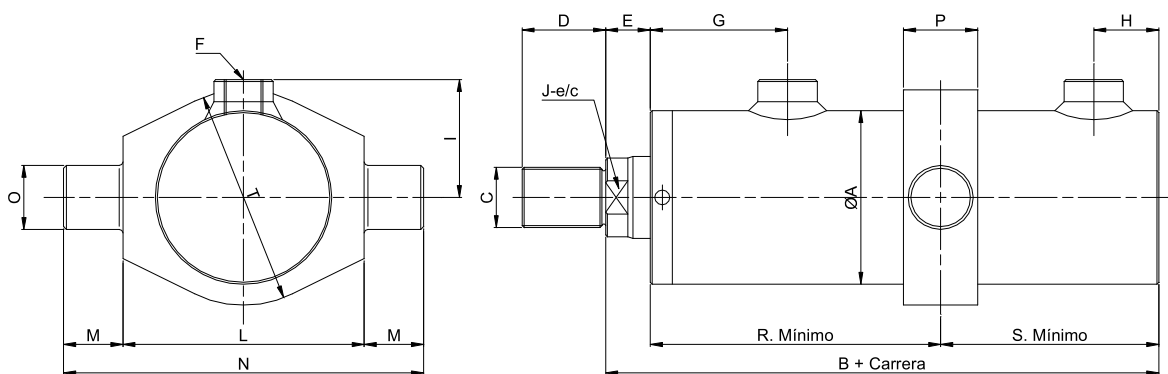


S3 Sujeción por muñones



Ø Pistón	40		50		63		80		100		125		160		200	
Ø	22	28	28	36	36	45	45	56	56	70	70	90	90	110	110	140
Ø A	50		60		75		95		115		145		185		230	
B	127		147		168		193		214		251		289		342	
Ø C Métr.	16x1.5		20x1.5		27x2		33x2		42x2		52x2		68x3		90x3	
D	22		28		36		45		56		68		86		105	
E	13		15		17		19		22		26		29		35	
Ø F GAS	3/8"		3/8"		1/2"		1/2"		3/4"		3/4"		1"		1"1/4	
G	50		55		64		74		83		95		113		127	
H	22		25		30		35		40		45		50		60	
I	40		45		55		65		77		92		114		150	
J	18	22	22	30	30	39	39	48	48	62	62	80	80	100	100	120
L	70		82		105		130		160		200		250		310	
M	18		22		27		32		36		45		58		72	
N	106		126		159		194		232		290		366		454	
Ø O	20		25		30		35		40		50		65		80	
P	25		30		35		40		50		60		85		90	
R	87		94		108		125		145		165		200		230	
S	59		64		74		85		100		110		140		160	
T	64		74		94		118		144		180		228		282	

Para cilindros con carreras superiores a 1000 mm añadir a **B** la longitud del distanciador correspondiente